



FB250-4A

Prime rating

Meets latest India CPCB emission norms (CPCBIV+) and noise norms



Genset Technical Data		Alternator Technical Data	
Genset Rating (kVA)	250	Alternator Make	Leroy Somer
No of Phases	3	No of Bearings	1
Power Factor	0.8	Alternator model	LSAP 45 L1
Voltage (V)	415/230	Alternator rating	250
Frequency (Hz)	50	Class of insulation	H
Current (A)	347	Coupling details	SAE 1/14
Controller Type	SEDEMAC GC1206	Voltage Variation (%)	1
Starting System	24V / 110 AH	Rated Full Load Current (A)	350
Genset Weight (kg)	3100	Fuel & Oil Systems Technical Data	
Noise @ 75% load (dBA)	< 75 @ 1m (As per ISO 8528)	Fuel System	CRS
Genset Dimensions (LxWxH) (mm)	4500 x 1520 x 2075	Type Of Fuel	Diesel
Battery Type	Lead Acid	Genset Fuel Tank Capacity (l)	480
Circuit Breaker Rating (A)	400	Fuel Consumption - @ 75% Load (l/hr)*	39.3
Engine Technical Data		Lube Oil change period (hrs)	750 Hrs. or 1 Year
Engine Model	A6G4DE250	Oil Type	10W30 CK4
Engine Speed (rpm)	1500	Oil Capacity (l)	28
Engine Volume (l)	7.98	Oil Consumption @100% load	< 0.1% of FC
Gross Rated Power (kW/hp)	223/303		
No. of cylinder	6		
Bore (mm)	112		
Stroke (mm)	135		
Compression Ratio	17.5 : 1		
Aspiration	TA		
Cooling System	Liquid Cooled		
Cooling System Capacity (l)	46		
Governing	Electronic A0		


Ratings in accordance with ISO 8528, ISO 3046, BS 5514 under standard reference conditions

* With Diesel specific gravity of 0.8355 at NTP and tolerance of +5%

Standard Reference Conditions: 27 degC Air inlet temp., 100kpa(750mm of Hg) atmospheric conditions

Meets latest India CPCB emission norms (CPCBIV+) and noise norms

FB250-4A

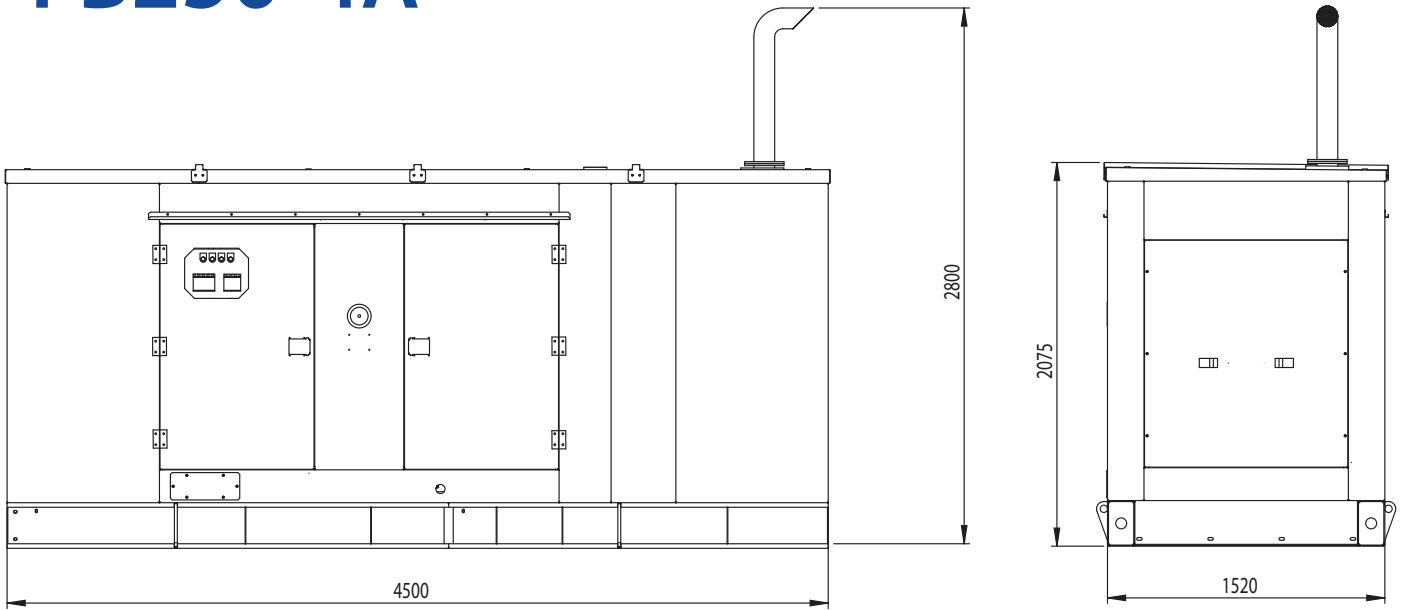

Caterpillar (NI) Limited is the manufacturer of FG Wilson brand diesel generating sets, and our facilities manufacture products in the following locations:
Brazil • China • India

With headquarters in Northern Ireland, FG Wilson products are distributed through a Global Dealer Network.
To contact your local Sales Office, please visit the FG Wilson website at www.fgwilson.com

In line with our policy of continuous product development, we reserve the right to change specification without notice.