

FB50-2A

Prime rating

Meets latest India CPCBII as per G.S.R 771(E) dated 11/12/2013 and its further amendments.

Meets CPCB / MOEF norms as per G.S.R 371(T) dated 17/05/2002 and its further amendments.




Genset Technical Data	
Genset Rating (kVA)	50
No of Phases	3
Power Factor	0.8
Voltage (V)	415/230
Frequency (Hz)	50
Current (A)	70
Controller Type	SEDEMAC GC1202
Starting System	12V / 90 AH
Genset Weight (kg)	1170
Noise @ 75% load (dBA)	< 75 @ 1m (As per ISO 8528)
Genset Dimensions (LxWxH) (mm)	2800X1090X1442
Battery Type	Lead Acid
Circuit Breaker Rating (A)	75


Engine Technical Data	
Engine Model	AL4CTIDG5
Engine Speed (rpm)	1500
Engine Volume (I)	3.84
Rated Power (kW)	40
No. of cylinder	4
Bore (mm)	104
Stroke (mm)	113
Compression Ratio	16.5 : 1
Aspiration	TA
Cooling System	Liquid Cooled
Cooling System Capacity (I)	13.5
Governing	Mechanical A1

Alternator Technical Data	
Alternator Make	Leroy Somer
No of Bearings	1
Alternator model	LSAP 42.3 H
Alternator rating	50
Class of insulation	Н
Coupling details	SAE 10
Voltage Variation (%)	1
Rated Full Load Current (A)	70

Fuel & Oil Systems Technical Data		
Fuel System	Inline FIP	
Type Of Fuel	Diesel	
Genset Fuel Tank Capacity (I)	155	
Fuel Consumption - @ 100% Load (I/hr)*	11.8	
Fuel Consumption - @ 75% Load (I/hr)*	9.7	
Fuel Consumption - @ 50% Load (I/hr)*	6.9	
Fuel Consumption Tolerance	5%	
Lube Oil change period (hrs)	600 Hrs. or 1 Year	
Oil Type	15W40	
Oil Capacity (I)	9	
Oil Consumption @100% load	< 0.1% of FC	

^{*}sp.gr of fuel - 0.835kg/litre Standard operating conditions as per ISO3046 / ISO8528 Prime Rating as per ISO8528

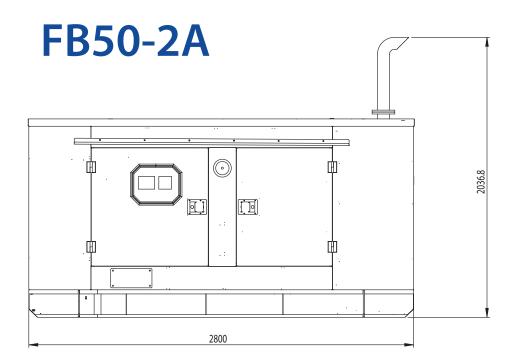

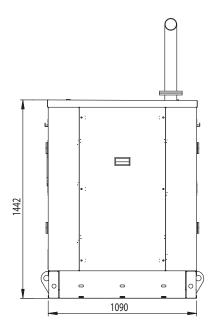

FG Wilson manufactures product in the following locations:

Brazil • China • India

With headquarters in Northern Ireland, FG Wilson operates through a Global Dealer Network. To contact your local Sales Office please visit the FG Wilson website at www.fgwilson.com.

FG Wilson is a trading name of Caterpillar (NI) Limited.