

FB160-2A

Prime rating

Meets latest India CPCBII as per G.S.R 771(E) dated 11/12/2013 and its further amendments.

Meets CPCB / MOEF norms as per G.S.R 371(T) dated 17/05/2002 and its further amendments.



Genset Technical Data	
Genset Rating (kVA)	160
No of Phases	3
Power Factor	0.8
Voltage (V)	415/230
Frequency (Hz)	50
Current (A)	224
Controller Type	SEDEMAC GC1202
Starting System	12V / 120 AH
Genset Weight (kg)	2125
Noise @ 75% load (dBA)	< 75 @ 1m (As per ISO 8528)
Genset Dimensions (LxWxH) (mm)	3910X1360X1885
Battery Type	Lead Acid
Circuit Breaker Rating (A)	250


Engine Technical Data	
Engine Model	AL6DTIDG4
Engine Speed (rpm)	1500
Engine Volume (I)	5.76
Rated Power (kW)	128
No. of cylinder	6
Bore (mm)	104
Stroke (mm)	113
Compression Ratio	16.5 : 1
Aspiration	TA
Cooling System	Liquid Cooled
Cooling System Capacity (I)	23
Governing	Electronic A0


Alternator Technical Data	
Alternator Make	Leroy Somer
No of Bearings	1
Alternator model	LSAP 44.3 H
Alternator rating	160
Class of insulation	Н
Coupling details	SAE 11.5
Voltage Variation (%)	1
Rated Full Load Current (A)	224

Fuel & Oil Systems Technical Data	
Fuel System	Rotary FIP
Type Of Fuel	Diesel
Genset Fuel Tank Capacity (I)	325
Fuel Consumption - @ 100% Load (I/hr)*	37
Fuel Consumption - @ 75% Load (I/hr)*	28.5
Fuel Consumption - @ 50% Load (I/hr)*	20
Fuel Consumption Tolerance	5%
Lube Oil change period (hrs)	600 Hrs. or 1 Year
Oil Type	15W40
Oil Capacity (I)	18
Oil Consumption @100% load	< 0.1% of FC

^{*}sp.gr of fuel - 0.835kg/litre Standard operating conditions as per ISO3046 / ISO8528 Prime Rating as per ISO8528

FB160-2A

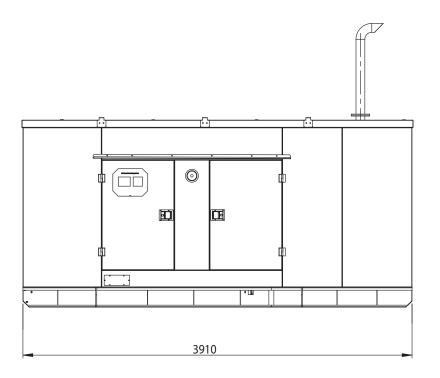

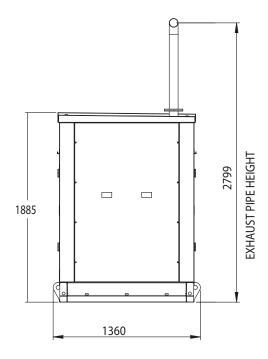

FG Wilson manufactures product in the following locations:

Brazil • China • India

With headquarters in Northern Ireland, FG Wilson operates through a Global Dealer Network. To contact your local Sales Office please visit the FG Wilson website at www.fgwilson.com.

FG Wilson is a trading name of Caterpillar (NI) Limited.